1700V /E TQ0000087 1 0 59.32 81.2 re W BT/F1 24 Tf1 0 0 1 141.26 760 (25.6 re W 155.9 0 0 36.6 403

Table of contents

Features

Applications

Table of contents

1 Maximum ratings

2 Packaging Characteristics

3 Electrical characteristics

4 Package drawing

5 Test conditions

Revision history

Attention

S1P03R170HBG-B

2 Packaging Characteristics

Table 2 Package Characteristics

Symbol	Description	Value	Unit	Note
R_{HS}	High-side Resistance	3.1	mΩ	
R_{LS}	Low-side Resistance	3.1		
Ls	Stray inductance	18	nH	
V_{ISO}	Isolation Test Voltage RMS, f=50Hz, t=1min	3.4		
	Terminal to Heatsink Creepage Distance	14.5		
	Terminal to Terminal Creepage Distance	13.0		
	Terminal to Heatsink Clearance	12.5		
	Terminal to Terminal Clearance	10.0		
R	Average Thermal Resistance of Per Upper Switch	06		
T_{jmax}	Maximum Junction Temperature	175		
T_{jop}	Operation Junction Temperature	-40 to +150		
T_{STG}	Storage Temperature Range	-40 to +150		
W	Weight	380		
Ms	Maximum Mounting Torque	6.0		

[1] Not subject to production test. Parameter verified by design/characterization.


3 Electrical characteristics

Table 4 SiC MOSFET characteristics (Tc = 25°C unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$V_{(BR)DSS}$	Drain-source breakdown voltage	1700	-	-	V	V_{GS} = 0V, I_D = 100μA	
$V_{GS(th)}$	Gate threshold voltage	2.5	3.1	4.0	V	V_{DS} = V_{GS}, I_D = 14.5mA	38.52 0.95999 ref*5 602.62
		-	2.3	-	V	V_{DS} = V_{GS}, I_D = 144mA, T_J = 175°C	

Table 5 Body diode characteristics (Tc = 25°C unless otherwise specified)

4 Package drawing

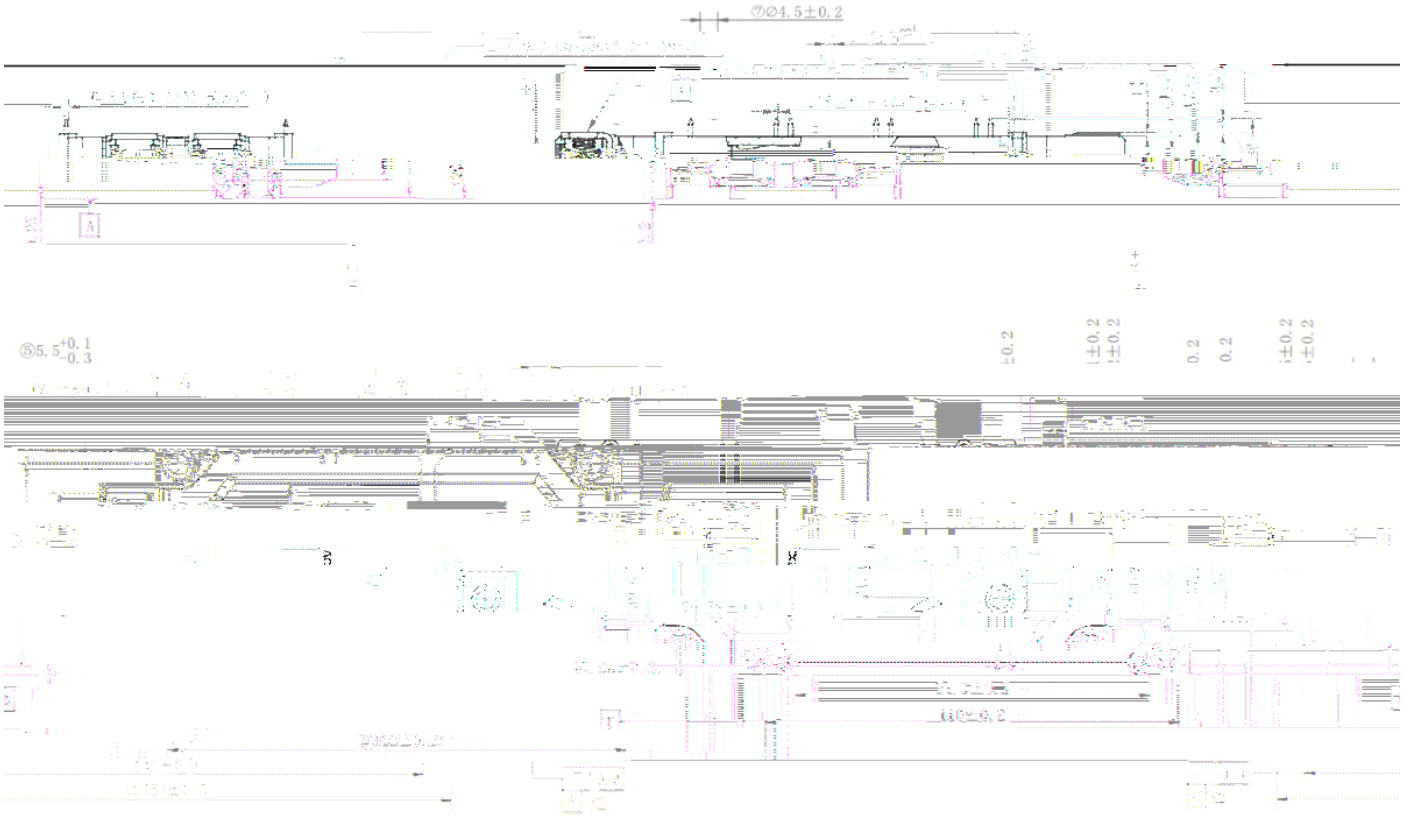

7. Except as otherwise explicitly approved by Sichain in a written document signed by authorized representatives of Sichain, Sichain' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

8. For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a Sichain representatives, for example but not limited to: transportation equipment, primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.